


D-ATIS 135.0
CLNC DEL 121.65 257.8
CPDLC
GND CON 121.9 121.75
BOSTON TOWER
128.8 257.8 (WEST)
132.225 257.8 (EAST)
BOSTON DEP CON
133.0

TOP ALTITUDE:
5000

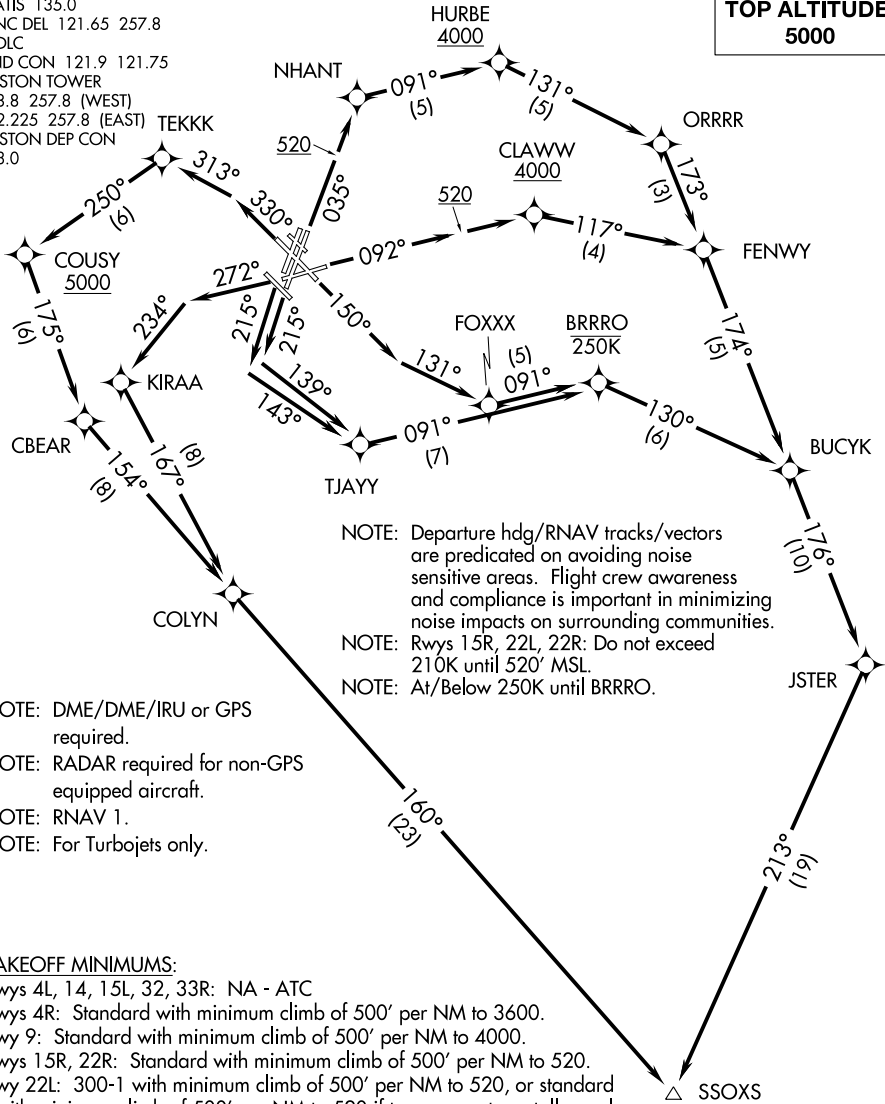

- NOTE: DME/DME/IRU or GPS required.
- NOTE: RADAR required for non-GPS equipped aircraft.
- NOTE: RNAV 1.
- NOTE: For Turbojets only.

TAKEOFF MINIMUMS:

- Rwys 4L, 14, 15L, 32, 33R: NA - ATC
- Rwys 4R: Standard with minimum climb of 500' per NM to 3600.
- Rwy 9: Standard with minimum climb of 500' per NM to 4000.
- Rwys 15R, 22R: Standard with minimum climb of 500' per NM to 520.
- Rwy 22L: 300-1 with minimum climb of 500' per NM to 520, or standard with minimum climb of 500' per NM to 520 if tower reports no tall vessels in the departure area.
- Rwy 27: Standard with a minimum climb of 500' per NM to 1300.
- Rwy 33L: Standard with a minimum climb of 500' per NM to 4900.

SANDY POINT
SEY

BUZRD

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.